
Euro Profile Sash Lock Body (72mm Centre)

Product Description:

- Easy reversible mechanism - Push from Rear & Turn. Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Dead Bolt, Brass Follower.
- Available with bolt through provision for 38 to 40 mm bolt through
- Live Bolt Tested for 200,000 Cycles & Dead Bolt for 50,000 Cycles.
- Operation: Deadbolt operated by Euro Profile Cylinders.
- Compatible with G-R1235, G-R1240, G-R1245 Rebate Set.

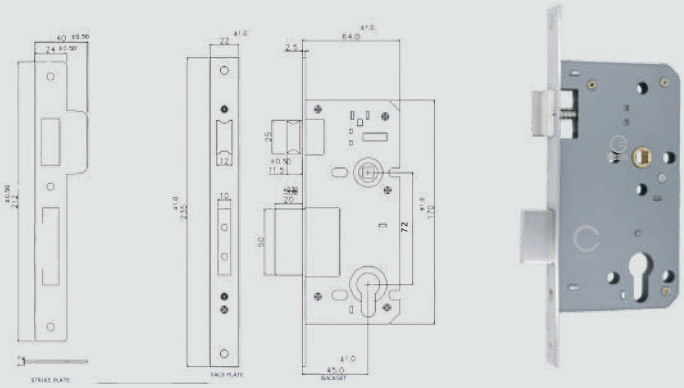

CF 6085 | 12209:2003 | 1634-1

Finishes:

SSS.PSS & special finish available upon request.
Also available Radius Corner

Standards:

Certification CE Marked to EN 12209 UKCA Marked to EN 12209, Fire tested to EN 1634-1 for use on fire doors up to 90 mins timber / 4hr steel.


ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALEET
G-MSL40-105	50X72	50	78X165	1	10	1080
G-MSL40-129	55X72	55	83X165	1	10	1080
G-MSL40-153	60X72	60	88X165	1	10	1080

2	M	4	1	0	F	2	B	C	1	0

Euro Profile Latch only in Lock Body (72mm Centre)

Product Description:

- Easily reversible mechanism by turning live bolt as suitable for inward / outward opening door & screwing main face plate.
- Follower is suitable for 8mm square spindle.
- Strike Plate & Face Plate Stainless Steel.
- Brass Live Bolt, Zinc Follower.
- Available with bolt through provision for 38 to 40 mm bolt through centre.
- Live Bolt Tested for 200,000 Cycles.
- Compatible with G-R1235, G-R1240, G-R1245 Rebate Set.

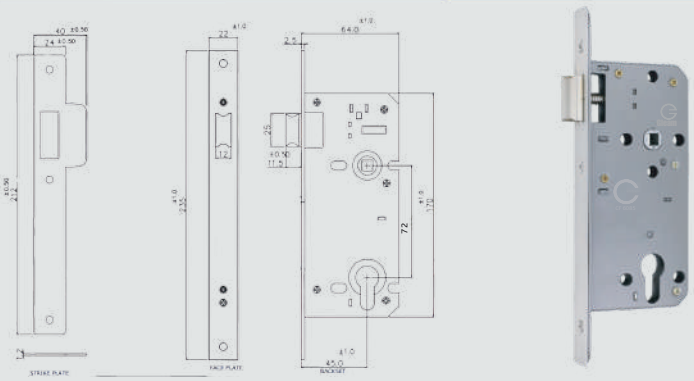

CF 6085 | 12209:2003 | 1634-1

Finishes:

SSS.PSS & special finish available upon request.
Also available Radius Corner

Standards:

Certification CE Marked to EN 12209 UKCA Marked to EN 12209, Fire tested to EN 1634-1 for use on fire doors up to 90 mins timber / 4hr steel.

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALEET
G-EPM-L16-183	50X72	50	78X165	1	10	1080
G-EPM-L16-144	55X72	55	83X165	1	10	1080
G-EPM-L16-145	60X72	60	88X165	1	10	1080

3	X	8	1	0	G	-	B	0	2	0