
Tubular Latch (Bolt Through) - CE Certified

Product Description:

- Suitable for 200,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & MS Body.
- Two piece faceplate assembly.
- Follower suitable for 8mm square spindle.
- Suitable for internal doors.
- To be used with Sprung furniture.
- Suitable for bolt through fixing of 32-38mm.
- Rebate set available (G-R0010).

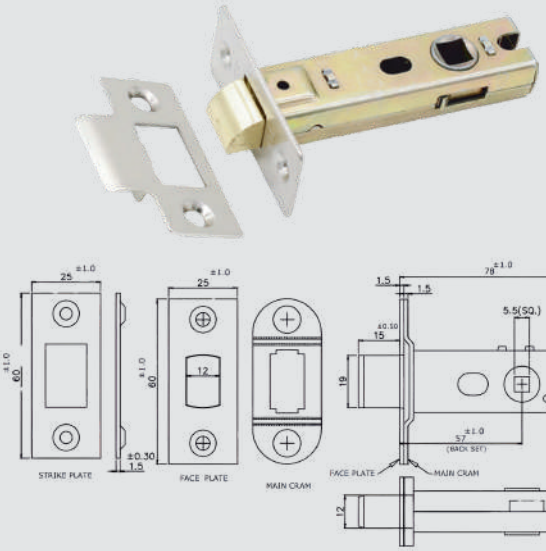

Finishes:

Satin Stainless Steel, Polished Stainless steel, and Special finish available upon request. Also Available In Radius Corner (G-TLBRZ11-3.00-2.5", G-TLBRZ12-3.00-3", G-TLBRZ13-3.00-4", G-TLBRZ14-3.00-5")

Standards:

Certification CE Marked to EN 12209 UKCA Marked to EN 12209, Fire tested to EN 1634-1 for use on fire doors up to 90 mins timber / 4hr steel.

Application:

For doors hinged on the left or right and requiring key and pull handle operation.


ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALEET
G-TLBZ21-3.00	2.5"	45	67X20	10	100	6000
G-TLBZ22-3.00	3"	57	79X20	10	100	6000
G-TLBZ23-3.00	4"	83	104X22	10	100	3600
G-TLBZ24-3.00	5"	107	129X22	5	80	3600

NPD	M	4	1	0	F	-	B	0	1	0

Tubular Latch - CE Certified

Product Description:

- Suitable for 200,000 Cycles.
- Zinc Live Bolt, Zinc follower, MS Faceplate, MS Striker plate & MS Body.
- Follower suitable for 8mm square spindle.
- Suitable for internal doors.
- To be used with Sprung furniture.
- Rebate set available (G-R0010).

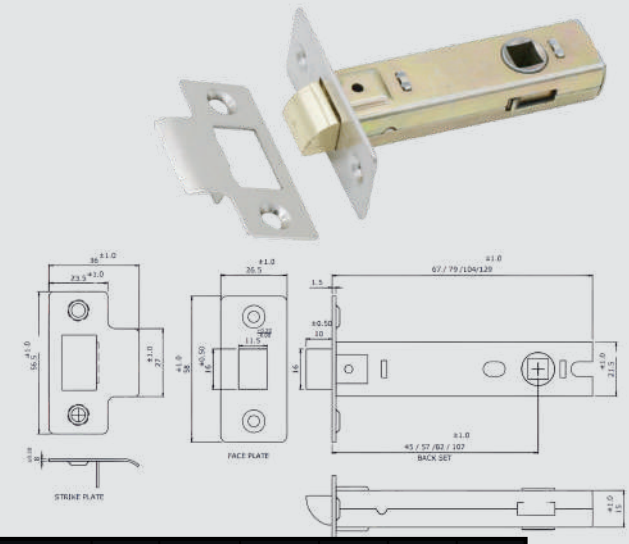

Finishes:

Satin Stainless Steel, Polished Stainless Steel, and Special finish available upon request. Also Available In Radius Corner (G-TLRZ44-3.00-2.5", G-TLRZ45-3.00-3", G-TLRZ46-3.00-4", G-TLRZ44-3.00-5")

Standards:

Certification CE Marked to EN 12209 UKCA Marked to EN 12209, Fire tested to EN 1634-1 for use on fire doors up to 90 mins timber / 4hr steel.

Application:

For doors hinged on the left or right and requiring key and pull handle operation.

ITEM CODE	SIZE	BACKSET	CASE SIZE	PCS. IN INNER	PCS. IN OUTER	PCS. IN PALEET
G-TLZ60-3.00	2.5"	45	67X22	10	100	6000
G-TLZ61-3.00	3"	57	79X22	10	100	6000
G-TLZ62-3.00	4"	82	104X22	10	100	3600
G-TLZ63-3.00	5"	107	129X22	5	80	3600

NPD	M	4	1	0	F	-	B	0	1	0