Flush Bolt for Wooden Doors


G-FB835 SS

Application:

- For securing the slave leaf of a pair of doors
- Suitable for use on swing or sliding doors

Specifications:

- Sprung lever action that flicks the bolt up and down.
- Material: Stainless Steel.
- Width: 20.5 mm.
- Lengths available: 150 mm, 200 mm, 300 mm, 450 mm.
- Depth: 22.5 mm
- Bolt Projection: 15 mm.
- Finish: Satin Stainless Steel (SS).





A(mm)	B(mm)
150	19
200	19
250	19
300	19

Flush Bolt for Metal Doors

G-FBM834 SS

Application:


- Designed for securing the slave leaf of a pair of doors.

Specifications:

- Sprung lever action for smooth flicking of the bolt up and down.
- Supplied with fixings suitable for metal doors.
- Radiused chamfered trigger for a smooth finger edge and user comfort.
- Material:

1. Housing: Zinc Alloy
2. Rod & Bolt: Steel

- Finish: Satin Chrome (SC).

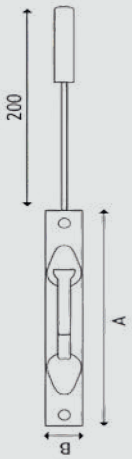



A(mm)	B(mm)
171	25