
WILKA®
SCHLIESSTECHNIK

Objekteinsteckschloss | Project mortise lock

5125



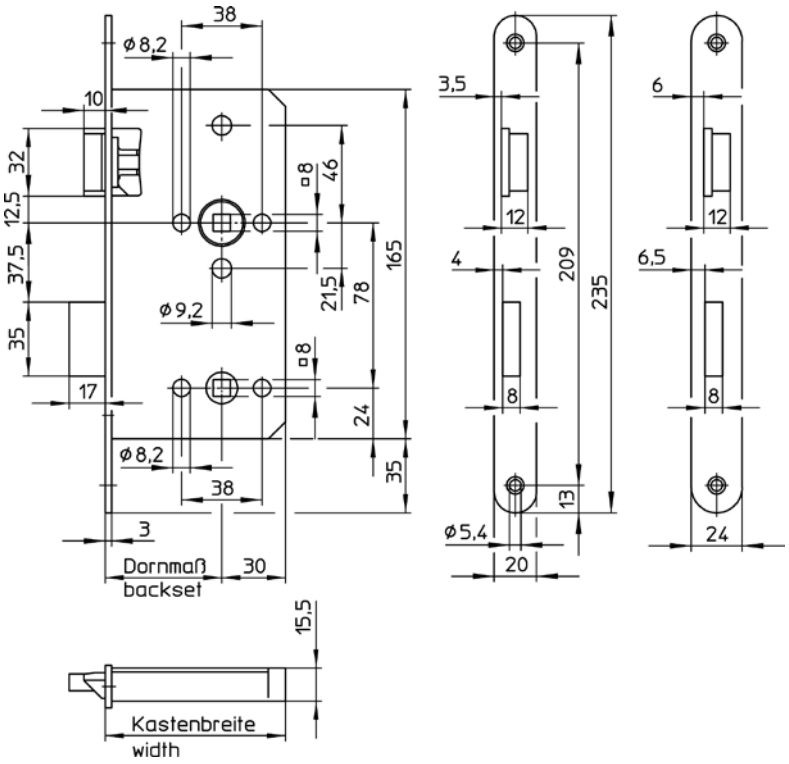

Art. Nr./Art. No.		5125
Dornmaße/Backsets	mm	55 60 65
Kastenbreiten/Widths	mm	85 90 95

Einsteck-Badezellenschloss, mit zwei 8mm Nüssen (Drücker- und Riegelnuss), 1-tourig = 17mm Riegelausschluss, Falle und Riegel Metall, mit Geräuschdämpfungselement für die Falle, Stulp nickelsilber lackiert, Schlosskasten geschlossen und verzinkt, für Falz- und Stumpftüren.
Anforderungen gemäß DIN 18 251 – 1 Klasse 2.

Sonderausführungen

- Stulp 20mm oder 24mm, käntig
- Stulp Edelstahl rostfrei matt gebürstet, Falle und Riegel vernickelt

Passende Schließbleche auf Seite: 234, 237

Bathroom mortise lock, two 8mm followers (latch and dead bolt-follower), single turn = 17mm dead bolt throw, latch bolt and dead bolt nickel-plated, noise reduction component for latch, forend nickel-silver lacquered, closed and galvanised lock case, suitable for rebated and non-rebated doors.
According to DIN 18 251-1 class 2 requirements.

Special designs

- Forend 20mm or 24mm, square ends
- Forend stainless steel, latch and dead bolt nickel-plated

Matching striking plates on page: 234, 237